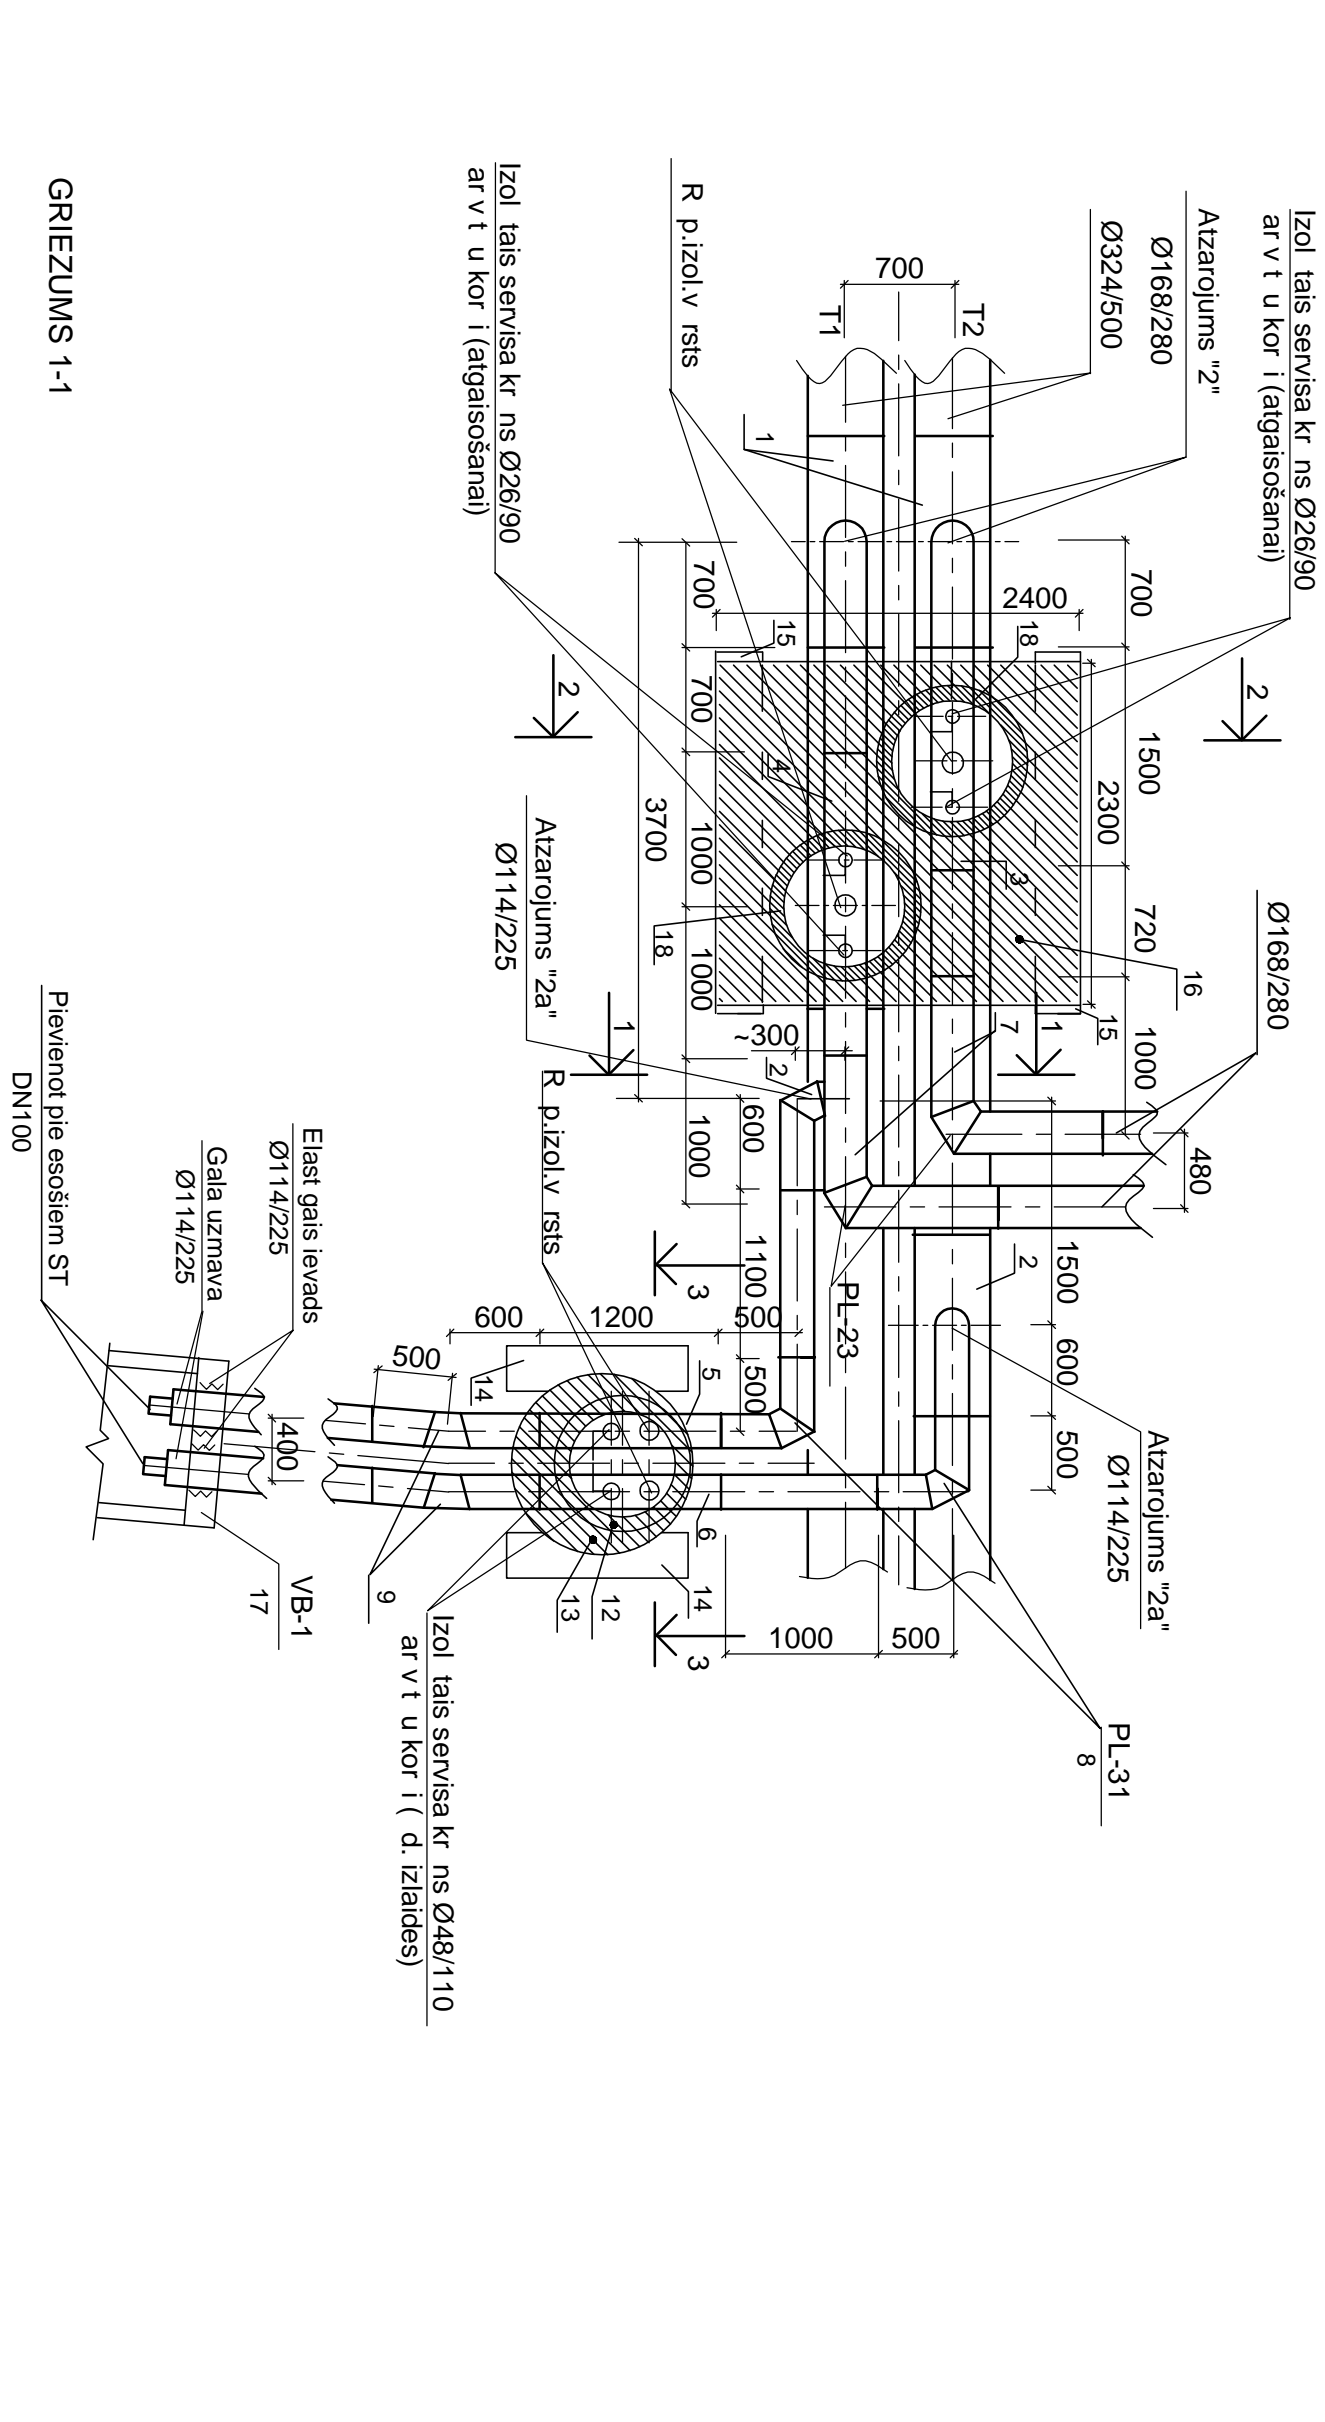



MEZGLS "2".ATZAROUJS "2", "2a". PL NS.




## GRIEZUMS 1-1

---

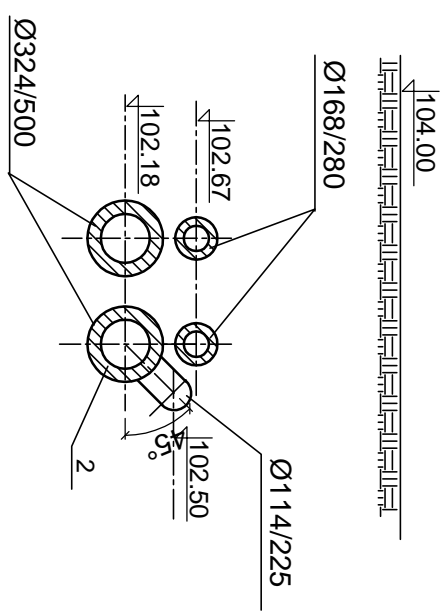
DN100











## GRIEZUMS 2-2

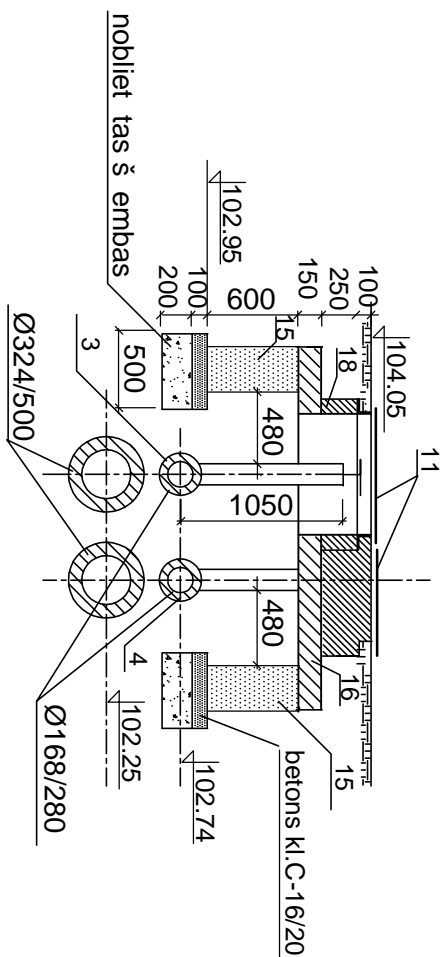

## GRIEZUMS 3-3

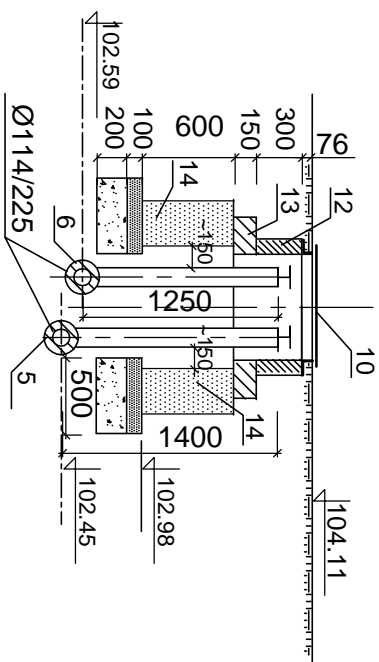

Nr. poz.	Apoz m jumi	Nosaukums Mont žāš vien bas	Daudzums uz mezglu	Vien bas svērs kg	M r.
1		Izol tais T-atz. Ø324/500-168/280mm paral ls. L=1.4x0.7m (atz. 2')	2		gab.
2		Izol tais T-atz. Ø324/500-114/225mm paral ls. L=1.20x0.6m (atz. 2a')	2		gab.
3	 	Izol tais v rsts Ø168/280 ar 2 ner s još t rauda servisa kr nem Ø26/90(algašošanai) ar ner s još t rauda v t u kor i (h=1050mm,L=1500mm)	1		gab.
4	 	Izol tais v rsts Ø168/280 ar 2 ner s još t rauda servisa kr nu Ø48/110( dīzelde) ar ner s još t rauda v t u kor i (h=1400mm,L=1200mm)	1		gab.
5	 	Izol tais v rsts Ø114/225 ar ner s još t rauda servisa kr nu Ø48/110( dīzelde) ar ner s još t rauda v t u kor i (h=1250mm,L=1200mm)	1		gab.
6	 	Izol tais l kums 90° Ø168/280mm .L=1.0x1.0m	2		gab.
7	PL-23	Izol tais l kums 90° Ø114/225mm .L=0.5x0.5m	2		gab.
8	PL-31	Izol tais l kums 90° Ø114/225mm .L=0.5x0.5m	2		gab.
9		Izol tais l kums 5° Ø114/225mm .L=0.5x0.6m	2		gab.
10		uguna l ka (tīps-viegl )	1		gab.
11	SIA "FL"	L ka 800/1000mm	2		gab.
12	SIA "Lugaži"	Gredz KC-7-3	1	120.0	gab.
13	SIA "Lugaži"	Gredz v ks KCP-10 (h=150)	1	280.0	gab.
14	SIA "Lugaži"	Parnatu bloks FBS-12-3-6 T	2	510	gab.
15	SIA "Lugaži"	Parnatu bloks FBS-24-3-6 T	2	1020	gab.
16	sk.BK da u	Monol ta dzbetona pl the P1 2400x2300 ar 2atv.	1		gab.
17	sk.BK da u	Dzbetona vairogblasts VB-1	1		gab.
18	sk.BK da u	Monol is dzelzsbetona gredzens G1	2		gab.
		Materi i!			
		Betons kl.C-16/20	0.40	m³	
		Š mbu parnasti nīs	0.80	m³	
		Hidroizol cīlas masika Technicol N.24(MGTN)	30.3	m²	

Grodus, pamatu blokus,pl tnes, kas atrodas zem , no ab m pus m  
noki t ar bituma hidroizol ciju.

[illegible]